

MODEL 3




Features

- Equipment mounted in secure tower operator
- Fast, simple installation – two conduit runs into operator and eight slotted bolt-holes for easy mounting
- Rated for continuous use up to 1,200 lbs solid gate panels
- Whisper quiet with no attachment to ceiling or wall to prevent noise and vibration in living or work spaces
- Flexible design for both track and trackless installations
- UL325 listed
- QuickFold gates open fully out of drive aisle
- Made in the USA with USA steel



TORXUN MODEL 3

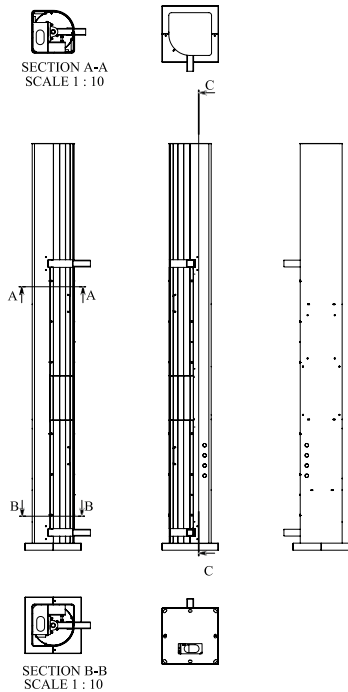

Technical Data

	Data
Duty cycle	Continuous
Drive	1/3 HP DC motor
Gate swing	100°
Opening time	90° in 13 seconds
Max gate weight	1,200 lbs
Max gate width	24 feet
Max gate height	15 feet
Power	110v, 30 amp

5-year limited warranty

Product	Part #
MODEL 3 8 foot tower	M308.000
MODEL 3 10 foot tower	M310.000
MODEL 3 custom height tower	M399.000

About TORXUN

TORXUN Vehicle Access Technologies engineers architectural-grade products for vehicle access controlled systems. Everything is produced in Tracy, California.



Precision Handcrafted
in Northern California
from U.S. Steel.